



NEW Autofocus 1D and 2D Code Reader
SR-1000 Series



EtherNet/IP™



SETTING THE STANDARD FOR CODE READING

SR-1000 Series



SR-1000 Series

3 CHALLENGES

CODE READERS FACE

1

READER CANNOT BE MOUNTED AT DESIRED DISTANCE

“Selecting the right reader and lens combination for a given distance is frustrating.”
“The system has to be designed to fit the specifications of the reader.”



2

OPTIMUM SETTINGS ARE UNKNOWN

“Reading was successful during setup but there are many errors during actual operation.”
“Setup requires a whole day.”



3

READING FAILS DUE TO GLARE

“Do we need to mount the reader at a certain angle? What is the best angle?”
“Is external lighting required? What kind?”



1 ANSWER

JUST PRESS THE BUTTON



PRESS THE BUTTON

1

AUTOFOCUS

The reader can be mounted at any distance.
(1000 mm max.)

2

AUTOMATIC TUNING

Determines optimum settings for exposure time,
image processing filter, etc. [Approx. 750000 combinations]

3

AUTOMATIC POLARISATION

Glare can be eliminated. Reader angle adjustment or
external lighting becomes unnecessary.


SET-UP COMPLETE



Autofocus 1D and 2D code reader
SR-1000 Series

WORLD'S FIRST AUTOMATIC POLARISATION CONTROL

The reader features both polarised and direct light sources.
Automatic polarisation filter selection eliminates glare and
allows flexible mounting.

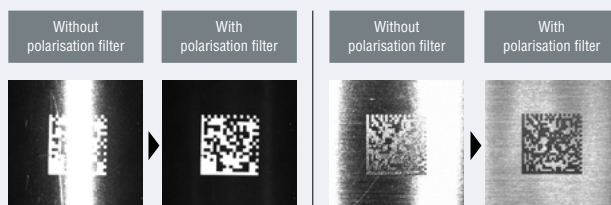

1

EASY SET-UP BY "JUST PRESSING THE BUTTON"

AUTOFOCUS

ONE READER FOR MANY APPLICATIONS

Mounting is less restricted by the performance or specifications of the code reader itself, thus improving flexibility in machine designing for production lines and jigs.

A single reader can be used for targets with different heights


Provides safe movement range for a robotic arm

Reading extremely small codes

FIELD OF VIEW 4× LARGER

Conventional field of view

Field of view of the SR-1000 Series

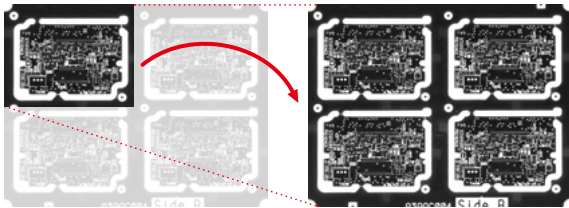

EVEN IF THE CODE IS

SMALL



0.063 mm

Distance: 110 mm

Range: 290 mm × 220 mm

4× WIDER
than conventional models

EVEN IF THE POSITION

CHANGES

Distance: 1000 mm

1.6× LONGER
than conventional models

EVEN IF THE DISTANCE IS

FAR
















AUTOMATIC TUNING

OPTIMUM SETTING OF EXPOSURE TIME, FILTERS AND MORE

The code reader automatically optimises the exposure time, image processing filter and other parameters according to the target and mounting distance.

CLEAR IMAGE CAPTURE


CORRECTION ITEMS AND EXAMPLES OF AFFECTED CODES

 Dark	CAPTURE BRIGHTNESS CORRECTION Automatically configures various combinations of exposure time, dynamic range and gain in order to achieve the optimal brightness.	 Black resin	 PCB
 Low contrast	CONTRAST THRESHOLD CORRECTION Automatically corrects black/white thresholds and optimises the contrast between code and background.	 Metal	 Ceramic
 Thin printing	FILTER CORRECTION Automatically selects the best filter and filtering intensity to correct the captured image.	 Bleeding	 Thick printing
 Distortion	GEOMETRIC CORRECTION Corrects distorted codes, such as those on cylinders and other round surfaces or when the reader is mounted at an angle.	 Parallel distortion	 Trapezoidal distortion
 Stray dots	IMAGE REDUCTION & CORRECTION Reducing the image size may reduce background noise or missing spaces. Defects from background noise, dirt or scratches may appear insignificant after the image size reduction, hence causing them to be neglected.	 Primary noise	 Dot printing

LATEST TECHNOLOGIES PROVIDE STABLE READING

HIGH-SPEED SEARCH


2D CODE SEARCH IN CAPTURED IMAGES



Binary processing enables immediate detection of 2D codes even if there is a code-like pattern in the field of view.

DEFECTIVE CODE POSITIONING PROGRAM

A newly developed positioning program for defective codes can identify the four corners of a 2D code based on a similar code detection pattern, leading to a significant improvement in code detection performance.




HIGH-LEVEL DECODING


CONTRAST ALGORITHM FOR LOCAL CONCENTRATION (CALC)

Our contrast algorithm for local concentration divides a code into smaller pieces to perform binary processing using thresholds specified for each division. This enables accurate black/white classification without being affected by uneven print density.

CONVENTIONAL TECHNIQUE

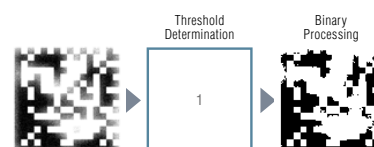

CALC TECHNIQUE

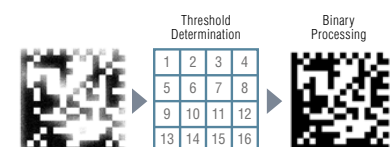


* The above illustration is only an example and it does not mean that a code will always be divided into 16 parts.


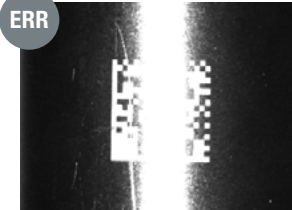







AUTOMATIC POLARISATION CONTROL

ENSURING FLEXIBLE MOUNTING

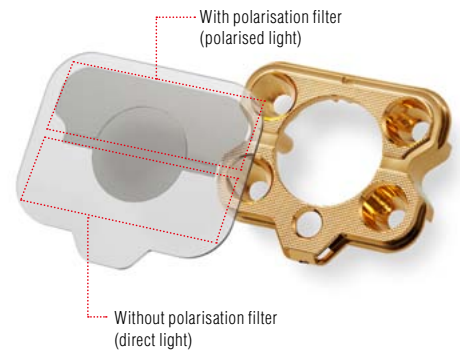Automatic polarisation control function World's First

The code reader automatically removes glare and eliminates the need for mounting angle adjustment or external lighting during installation. When combined with the autofocus function, mounting becomes highly flexible.

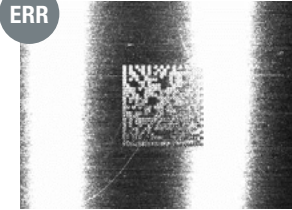

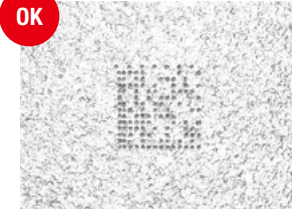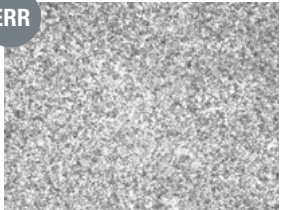		Without polarisation filter	With polarisation filter
BLACK RESIN			
CYLINDER			
METAL			
HAIRLINE			
METAL			
DPM ON CAST SURFACE			


NEW OPTICAL DESIGN FOR STABLE READING

CPC (Compound Parabolic Concentrator) Illumination


A specially shaped reflector has been designed to create high efficiency illumination by reducing loss in light intensity from the high intensity LEDs. Gold plating maximises the reflectance to achieve brightness exceeding conventional levels by 400%. This provides reading under bright, uniform illumination even at long ranges.



Conventional model



SR-1000



Light is concentrated efficiently within the field of view to provide high intensity illumination.

TWO MODES CAN BE SELECTED DEPENDING ON THE APPLICATION



UNAFFECTED BY CHANGING CONDITIONS

SMART MODE **NEW**


FOR CONSISTENT READING REGARDLESS OF CODE CONDITIONS



LOW CONTRAST
CODE

Fluctuations in code conditions are predicted during tuning and extended reading settings are automatically generated. This ensures stable reading even when the contrast of the code changes, eliminating the need to reconfigure the code reader.

The reader predicts 43 patterns of alternative printing conditions.

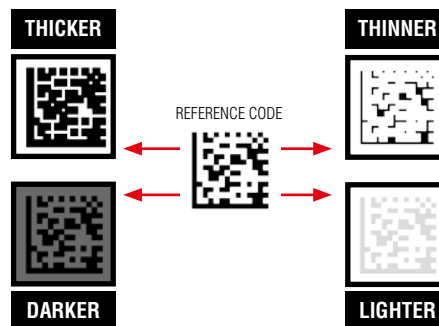

DETECTING CHANGES IN CODE CONDITIONS

CUSTOM MODE

FOR CODE QUALITY MANAGEMENT

The SR-1000 has the functionality to make judgements on code quality. Because code quality degradation can be detected before reading errors occur, this mode can be used for predictive maintenance of the printing process.

Matching level judgement function

Provides code quality comparison

Two codes, which both have a reading rate of 100%, can still be distinguished by the matching level



Reading rate **100%**
Matching level **75**



Reading rate **100%**
Matching level **43**

Code quality verification function

Verification based on code quality standards

OUTPUT DATA **AD-ERMT-55841:B**

TOTAL GRADE JUDGEMENT

Judgement can also be given for each parameter



SUPPORTED STANDARDS

- ISO/IEC 15415
- ISO/IEC TR 29158 (AIM DPM-1-2006)
- SAE AS9132
- SEMI T10-0701



*This function is designed for 2D codes (QR, DataMatrix, GS1 Composite, PDF417).

ADVANCED SETUP SOFTWARE

AUTOID NETWORK NAVIGATOR **SR-H4W** NEW



The software now provides not only easy code reader setup but also functionality to reduce man-hours for preliminary tests. It is now possible to connect to the software through USB. (SR-1000 Series only)

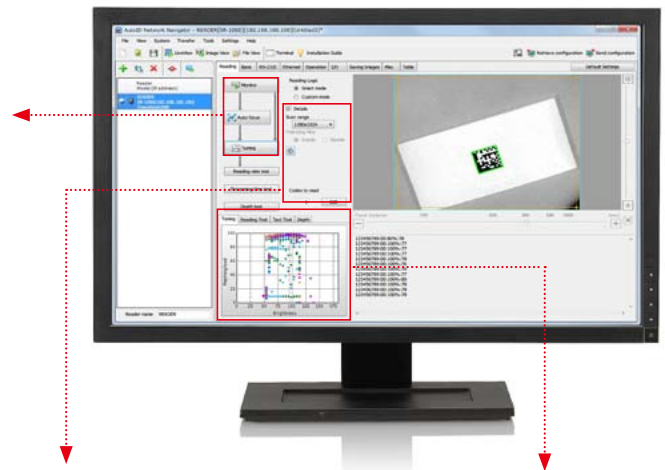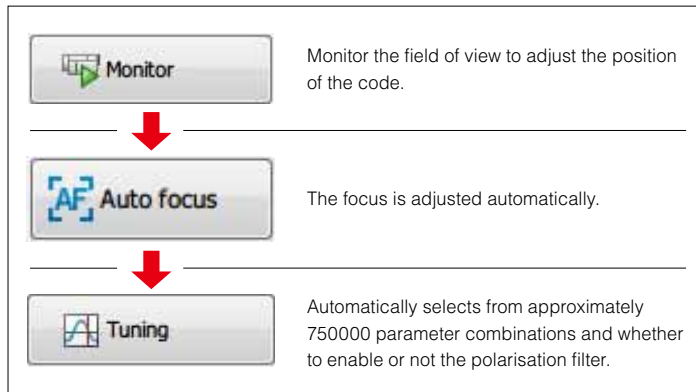



ADVANCED SETTINGS

☒ Details

Image capture range

1280x1024

Polarizing filter
☒ Enable ☐ Disable

Bank to Tune/Test

1

☒ Test with target bank
 Codes to read

1



Edit

IMAGE CAPTURE RESOLUTION

The lower the resolution, the shorter the reading time becomes. The image capture resolution is selectable from 800 × 600, 1280 × 1024 and user defined.

POLARISATION FILTER

Selectable between enabled or disabled.

TARGET BANK (in custom mode only)

Specify the parameter bank number to modify.


TUNING HISTORY (in custom mode only)

Tuning history can be reviewed.

NO. OF CODES FOR READING

Specify the number of codes to read simultaneously.

TUNING MONITOR




The optimum settings are automatically determined from multiple combinations of image processing filters and brightness levels.

ETHERNET COMMUNICATION WIZARD NEW

Setup can be completed in just four steps with a question-answer form including visual explanations. In previous versions, the user had to understand the available settings on the screen and determine which items are required to be input.

The new version uses a setup wizard to eliminate the need for item extraction, reducing man-hours for communication setup.

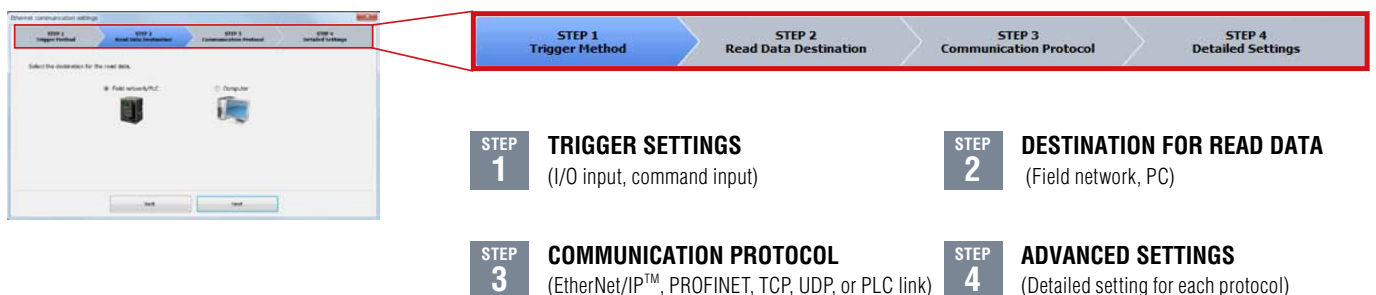

SOPHISTICATED MEASUREMENT MODES

The SR-1000 Series provides pre-verification prior to line operation based on tuning results as well as measurement of applicable line speed for reading codes at high speeds.

READING RATE MEASUREMENT

The reading success rate can be measured without conducting reading tests with multiple targets on the actual production line or equipment.

Tuning	Reading Test	Tact Test	Depth
Reading Test	100%		
Matching level	97		
Symbology	DataMatrix(12 x 12)		
Cell size	1.00mm		
Code size (width)	12.0mm		
PPC	25.0pixel/cell		
Read Data	123456789		



READING TACT MEASUREMENT

The reading cycle time (tact) can be determined without conducting reading tests with targets on the actual production line or equipment.


Tuning	Reading Test	Tact Test	Depth
Read time	32ms		
Max time	33ms		
Min time	32ms		
Read Data	123456789		

READING DEPTH MEASUREMENT NEW

The depth of field can be determined from the mounting distance and the code used for tuning, without conducting reading tests with targets on the actual production line or equipment.
(When the mounting distance changes, perform re-tuning to enable reading again.)

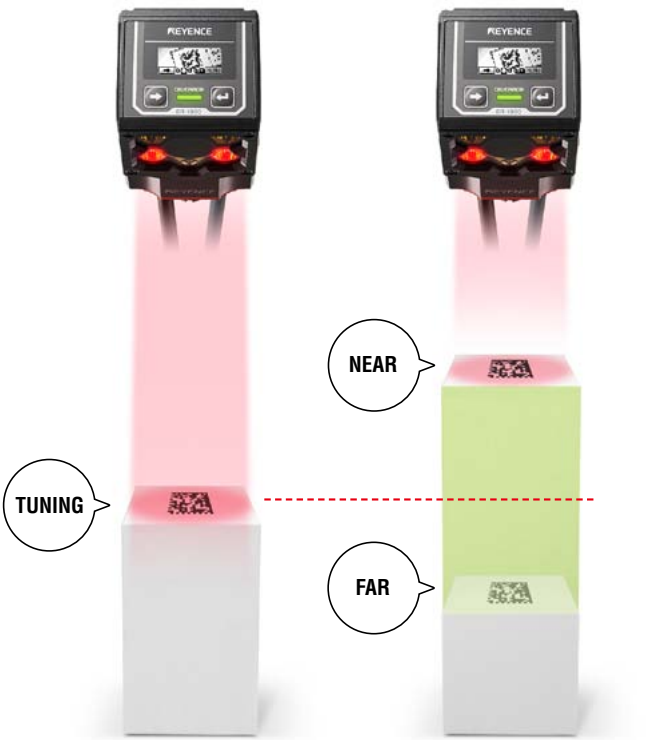

LINE SPEED MEASUREMENT NEW

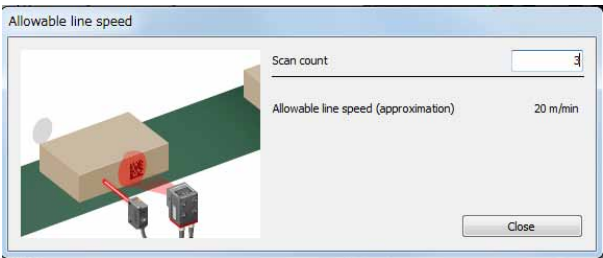


You can check allowable line speed before installation. This helps to reduce man-hours that are spent to adjust the production line designs or jigs.

FIRST-IN-ITS-CLASS, BUILT-IN OLED DISPLAY


CHECK OPERATION ON-SITE WITHOUT A PC

There is no need for a personal computer or monitoring the facility. The code position adjustment and operating condition can be checked simply with the intuitive built-in display.

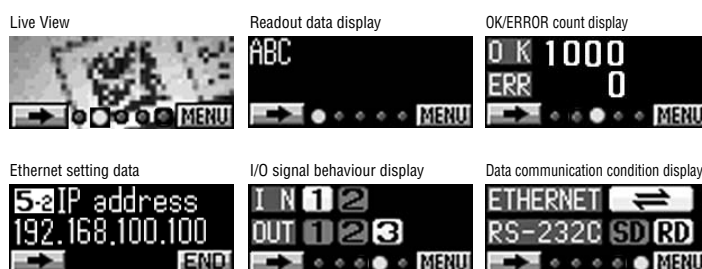

EASY SETUP WITHOUT A PC

You can set the optimum reading parameters after adjusting the code position and simply pressing the ENTER button to complete the fully-automatic tuning.

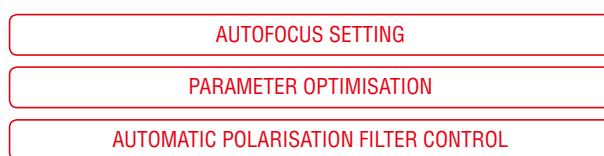



Reading test starts automatically.

HIGHLY-ADVANCED FUNCTIONS OFFER SIMPLE OPERATION

MASTER/SLAVE FUNCTION FOR USING MULTIPLE READERS EFFICIENTLY

This function drastically reduces the programming load on the host computer/PLC when multiple readers are used. Two modes are available: multi-drop link mode and multi-head mode.


* SR-D100/750 Series units can also be added (in combination with SR-1000 Series units) into this function.

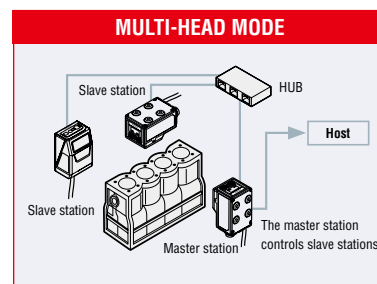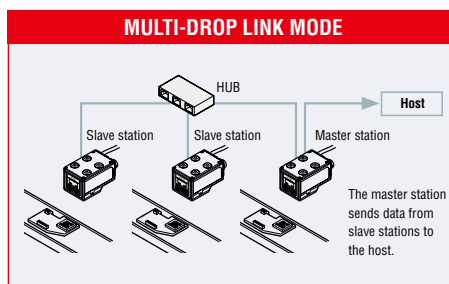

AUTOMATIC SELECTION OF OPTIMAL READING CONDITIONS (PARAMETER BANK FUNCTION)


CUSTOM MODE ONLY

The reader will automatically alternate between registered parameter banks until a required parameter bank is selected.

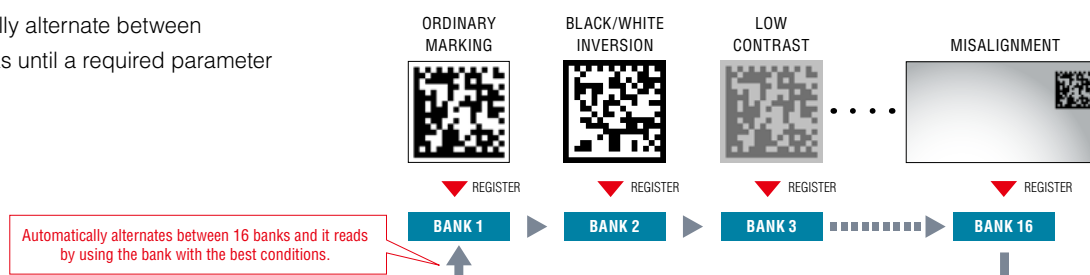

SYSTEM CONFIGURATION DIAGRAM

SR-1000 Series

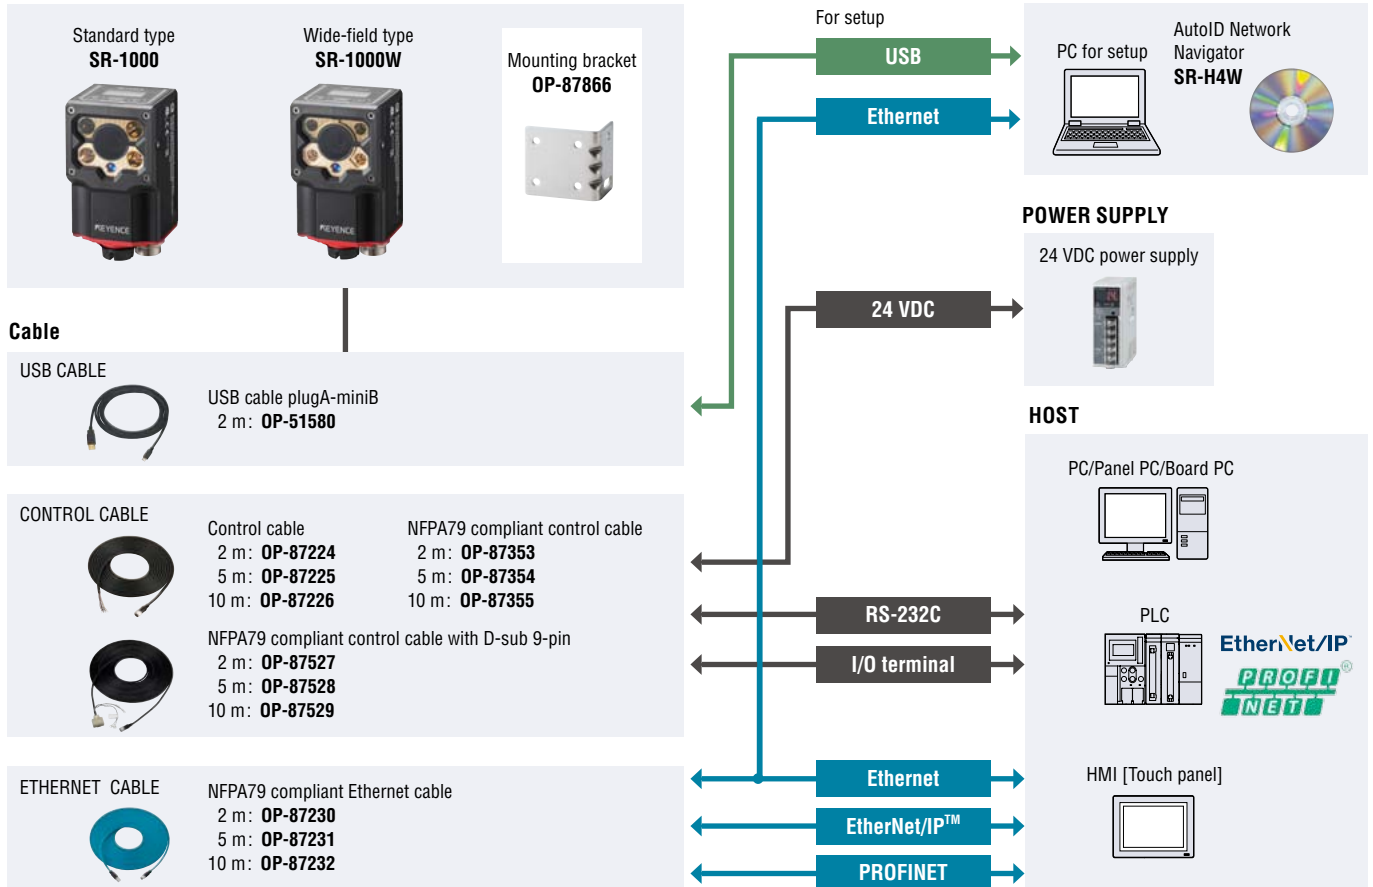

READING RANGE CHARACTERISTICS [TYPICAL]


SR-1000

MINIMUM RESOLUTION

Distance	Unit (mm)	
	2D	Barcode
110	0.063	0.082
110 to 140	0.082	
110 to 230	0.14	
110 to 300	0.18	0.11
110 to 400	0.24	0.15
110 to 600	0.37	0.22
110 to 1000	0.61	0.37

FIELD OF VIEW

Distance	Unit (mm)			
	Image capture range (1280×1024)		Image capture range (800×600)	
Distance	Width	Height	Width	Height
110	30	24	19	14
140	40	32	25	18
230	68	54	42	32
300	90	72	56	42
400	122	97	76	57
600	185	148	116	87
1000	312	250	195	146

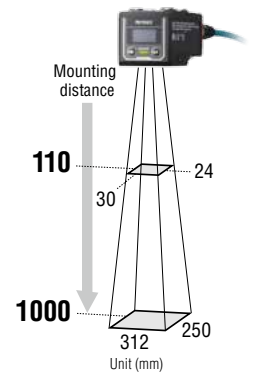


SR-1000W

MINIMUM RESOLUTION

Distance	Unit (mm)	
	2D	Barcode
50	0.082	0.082
50 to 100	0.14	
50 to 150	0.20	
50 to 230	0.30	0.18
50 to 300	0.38	0.23
50 to 400	0.51	0.31
50 to 600	0.76	0.45

FIELD OF VIEW

Distance	Unit (mm)			
	Image capture range (1280×1024)		Image capture range (800×600)	
Distance	Width	Height	Width	Height
50	35	28	22	16
100	67	54	42	31
150	99	79	62	46
230	150	120	93	70
300	194	155	121	91
400	257	206	161	120
600	384	307	240	180

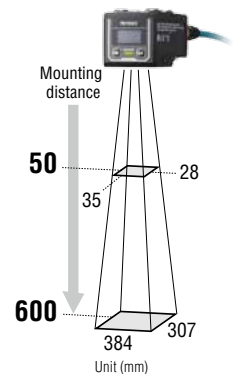

SPECIFICATIONS



Main unit

Model*2			SR-1000	SR-1000W
Type			Standard type	Wide-field type
Receiver	Sensor		CMOS Image Sensor	
	Number of pixels		1280 × 1024 pixels	1280 × 1024 pixels
Light emitter	Illumination light source		High intensity red LED	
	Pointer light source		High intensity green LED	
Focus adjustment			Autofocus*1	
Reading specifications	Supported symbol	2D	QR, MicroQR, DataMatrix (ECC200), GS1 DataMatrix, PDF417, Micro PDF417, GS1 Composite (CC-A, CC-B, CC-C)	
		Barcode	GS1 DataBar, CODE39, CODE39 Full ASCII, ITF, NW-7 (Codabar), CODE128, 2of5 (Industrial 2of5), C00P 2of5, GS1-128, JAN/EAN/UPC, Trioptic CODE39, CODE93, Pharmacode	
	Minimum resolution	2D	0.063 mm	0.082 mm
		Barcode	0.082 mm	0.082 mm
	Reading distance		110 to 1000 mm	50 to 600 mm
	Field of view for reading (Typical example at 400 mm)		122 × 97 mm	257 × 206 mm
I/O specifications	Control input	Number of inputs	2	
		Input type	Bidirectional voltage input	
		Maximum rating	26.4 VDC	
		Minimum ON voltage	15 VDC	
		Maximum OFF current	0.2 mA or less	
	Control output	Number of outputs	3	
		Output type	Photo MOS relay output	
		Maximum rating	30 VDC	
		Maximum load current	1 output: 50 mA or less, Total of 3 outputs: 100 mA or less	
		Leakage current when OFF	0.1 mA or less	
		Residual voltage when ON	1 V or less	
	Ethernet	Communication standard	IEEE 802.3 compliant, 10BASE-T/100BASE-TX	
		Supported protocol	TCP/IP, SNMP, FTP, BOOTP, MC Protocol, Omron PLC link, KV STUDIO, EtherNet/IP™, PROFINET	
	Serial communication	Communication standard	RS-232C compliant	
		Transmission speed	9600, 19200, 38400, 57600, 115200 bps	
	USB	Supported protocol	No-protocol, MC Protocol, SYSWAY, KV STUDIO	
		Communication standard	USB 2.0 Full Speed compliant	
Environmental resistance	Enclosure rating		IP65	
	Ambient temperature		0 to +45°C	
	Ambient storage temperature		-10 to +50°C	
	Relative humidity		35 to 85% RH (No condensation)	
	Storage ambient humidity		35 to 85% RH (No condensation)	
	Ambient luminance		Sunlight: 10000 lux, Incandescent lamp: 6000 lux, Fluorescent lamp: 2000 lux	
	Operating environment		No dust or corrosive gas present	
Rating	Power voltage		24 VDC ±10%	
	Current consumption		Approx. 700 mA	
	Weight		Approx. 200 g	

*1 The focal position can be adjusted automatically during installation.

*2 We have prepared the specific model for use in India only.

Please contact us if you need the details

Setup software



Model	SR-H4W
Supported OS	Microsoft Windows 8 Professional or later 32bit/64bit (Except for Windows RT) Microsoft Windows 7 Professional or later 32bit/64bit Microsoft Windows VISTA Business/Ultimate SP2 or later 32bit
Running environment*	• RAM: System memory 1 GB or more (2 GB or more for 64 bit OS) • Screen resolution: 1024 × 768 or more

* .NET Framework 3.5 SP1 or above has been installed.


DIMENSIONS

Unit: mm

Main unit SR-1000/1000W



When the mounting bracket (OP-87866) is used



Please visit: www.keyence.com

KEYENCE CORPORATION

AUSTRIA
Phone: +43 22 36-3782 66-0

BELGIUM
Phone: +32 1 528 1222

BRAZIL
Phone: +55-11-3045-4011

CANADA
Phone: +1-905-366-7655

CHINA
Phone: +86-21-68757500

CZECH REPUBLIC
Phone: +420 222 191 483

FRANCE
Phone: +33 1 56 37 78 00

GERMANY
Phone: +49 61 02 36 89-0

HONG KONG
Phone: +852-3104-1010

HUNGARY
Phone: +36 1 802 73 60

INDIA
Phone: +91-44-4963-0900

INDONESIA
Phone: +62-21-2966-0120

ITALY
Phone: +39-02-6688220

JAPAN
Phone: +81-6-6379-2211

KOREA
Phone: +82-31-789-4300

MALAYSIA
Phone: +60-3-2092-2211

MEXICO
Phone: +52-81-8220-7900

NETHERLANDS
Phone: +31 40 20 66 100

POLAND
Phone: +48 71 36861 60

ROMANIA
Phone: +40 269-232-808

SINGAPORE
Phone: +65-6392-1011

SLOVAKIA
Phone: +421 2 5939 6461

SLOVENIA
Phone: +386 1-4701-666

SWITZERLAND
Phone: +41 43-45577 30

TAIWAN
Phone: +886-2-2718-8700

THAILAND
Phone: +66-2-369-2777

UK & IRELAND
Phone: +44-1908-696900

USA
Phone: +1-201-930-0100

VIETNAM
Phone: +84-4-3760-6214



SAFETY INFORMATION

Please read the instruction manual carefully in order to safely operate any KEYENCE product.

